


## Application and Use

For efficient pumping of primary treated domestic wastewater or stormwater, suitable for pumping to council gravity sewer lines or when fall is not available on site.

## Specifications

Code: DW2100P  
 Max. Vol: 2100L  
 Voltage: 240 V/50Hz  
 Pump: Bianco B-42A - 0.55kW  
 Discharge: 25mm BSP  
 Max Head: 30m  
 Flow: 2.1 m<sup>3</sup>/h @ 20m Head  
 Alarms: High Level with mute reset  
 Effluent quality: No change in state  
 Conforming Standards: AS/NZS1546.1:2008, AS/NZS3500.2.2018 Section 12.8\*

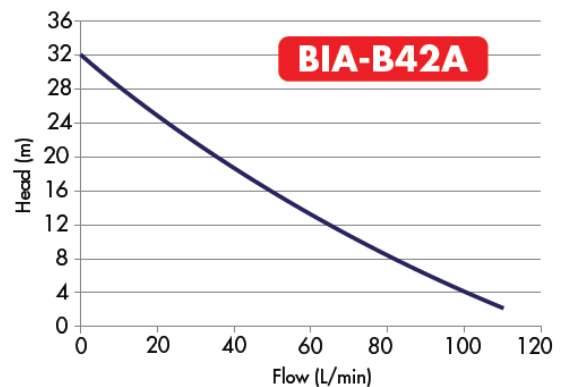

\* compliance to AS/NZS3500.2.2018 Section 12.8 requires the supply installation of an isolation valve and minimum DN50 vent fitted by others

## Features and Benefits

- Light weight modular system
- Simple proven technology
- Low power consumption

## Maintenance

Maintenance requirements are as per your local authority or as required pump servicing, and high level alarm testing.