

## DEVAN 750L STANDARD PUMP STATION

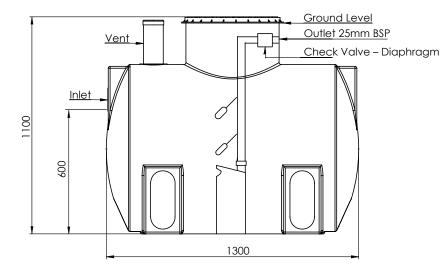




## Application and Use

DEVAN

For efficient pumping of primary treated domestic wastewater or stormwater, suitable for pumping to council gravity sewer lines or when fall is not available on site.

## Specifications

Code: DW750P Max. Vol: 750L Voltage: 240 V/50Hz Pump: Bianco B-42A - 0.55kW Discharge: 25mm BSP Max Head: 30m Flow: 2.1m3/h @ 20m Head Alarms: High Level with mute reset Effluent quality: No change in state Conforming Standards: AS/NZS3500.2.2018 Section 12.8\*



\* compliance to AS/NZS3500.2.2018 Section 12.8 requires the supply installation of an isolation valve and minimum DN50 vent fitted by

others

Features and Benefits

Light weight modular system Simple proven technology Low power consumption

Maintenance

## 0800 338 268 | DEVAN.CO.NZ